

# SPECIAL PACKAGING INSTRUCTION

Form Approved -  
OMB No. 0704-0188

The public reporting burden for this collection of information is estimated to average 30 days per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. **PLEASE DO NOT RETURN YOUR FORM TO THIS ADDRESS**

1. PART OR DRAWING NO. (CAGE) NOMENCLATURE <b>10530 B (78385) HEATER, VEHICULAR, COMPARTMENT</b>			2. CODE IDENT <b>19207</b>		3. SPI NO. <b>AK11943323</b>	
4. NATIONAL STOCK NUMBER <b>2540-01-1943323</b>			5. DATE OF DRAWING <b>6-25-2014</b>		6. REVISION <b>C</b>	
7. QUP <b>1 EA</b>	8. ICQ <b>NONE</b>	9. UNIT PACK WT. (LB) <b>24.4</b>	10. UNIT PACK CU (CU FT) <b>1.210</b>		11. UNIT PACK SIZE (INCHES) <b>19.7 x 11.8 x 9.0</b>	
12. MILITARY PRESERVATION (METHOD) <b>MIL-STD-2073-1D, METHOD 42</b>			18. STEPS <b>1B</b>	19. REQ'D	20. DESCRIPTION <b>CUSHIONING: SEE SHEET 2</b>	
13. CLEANING <b>MIL-STD-2073-1D</b>			2C		<b>CONTAINER: ASTM-D5118, STYLE RSC, TYPE CF</b>	
14. DRYING <b>MIL-STD-2073-1D</b>			3		<b>GRADE 275, CLASS D, SIZE 11 X 8-3/8 X 18-3/8</b>	
15. PACKING			4C		<b>BARRIER: MIL-B-117, STYLE 1, TYPE I, CLASS E</b>	
a. LEVEL A <b>MIL-STD-2073-1D AND NOTE D</b>					<b>SIZE 22 X 23</b>	
b. LEVEL B <b>MIL-STD-2073-1D AND NOTE D</b>					<b>CONTAINER; ASTM-D5118, STYLE RSC, TYPE CF</b>	
16. MARKING <b>MIL-STD-129</b>					<b>GRADE W5C, CLASS WR, SIZE 11-1/2 X 8-3/8 X 19-1/8</b>	

17. NOTES / DRAWING

- A. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
- B. SEE SHEET 2 FOR CUSHIONING INSTRUCTIONS.
- C. CLOSE CONTAINER IN ACCORDANCE WITH ASTM-D1974
- D. LEVEL A: LEVEL A PACKING SHALL BE ACCOMPLISHED USING WOOD-CLEATED PANELBOARD SHIPPING BOXES, CONFORMING TO ASTM-D 6251, TYPE III, CLASS 2 OR NAILED WOOD BOXES CONFORMING TO ASTM-D 6880, CLASS 2.  
LEVEL B: THE UNIT CONTAINER IS AN ACCEPTABLE LEVEL B SHIPPING CONTAINER.
- E. INSPECT THE PRESERVATION, THE UNIT PACK AND THE PACKAGING IN ACCORDANCE WITH MIL-STD-2073-1 AND THE APPLICABLE CONTAINER SPECIFICATION.


# SPECIAL PACKAGING INSTRUCTION

Form Approved  
OMB No. 0704-0188

The public reporting burden for this collection of information is estimated to average 30 days per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. **PLEASE DO NOT RETURN YOUR FORM TO THIS ADDRESS**

1. PART OR DRAWING NO. (CAGE) NOMENCLATURE 10530 B (78385) HEATER, VEHICULAR, COMPARTMENT	2. CODE IDENT 19207	3. SPI NO. AK11943323
4. NATIONAL STOCK NUMBER 2540-01-1943323	5. DATE OF DRAWING 6-25-2014	6. REVISION C

## 17. NOTES / DRAWING

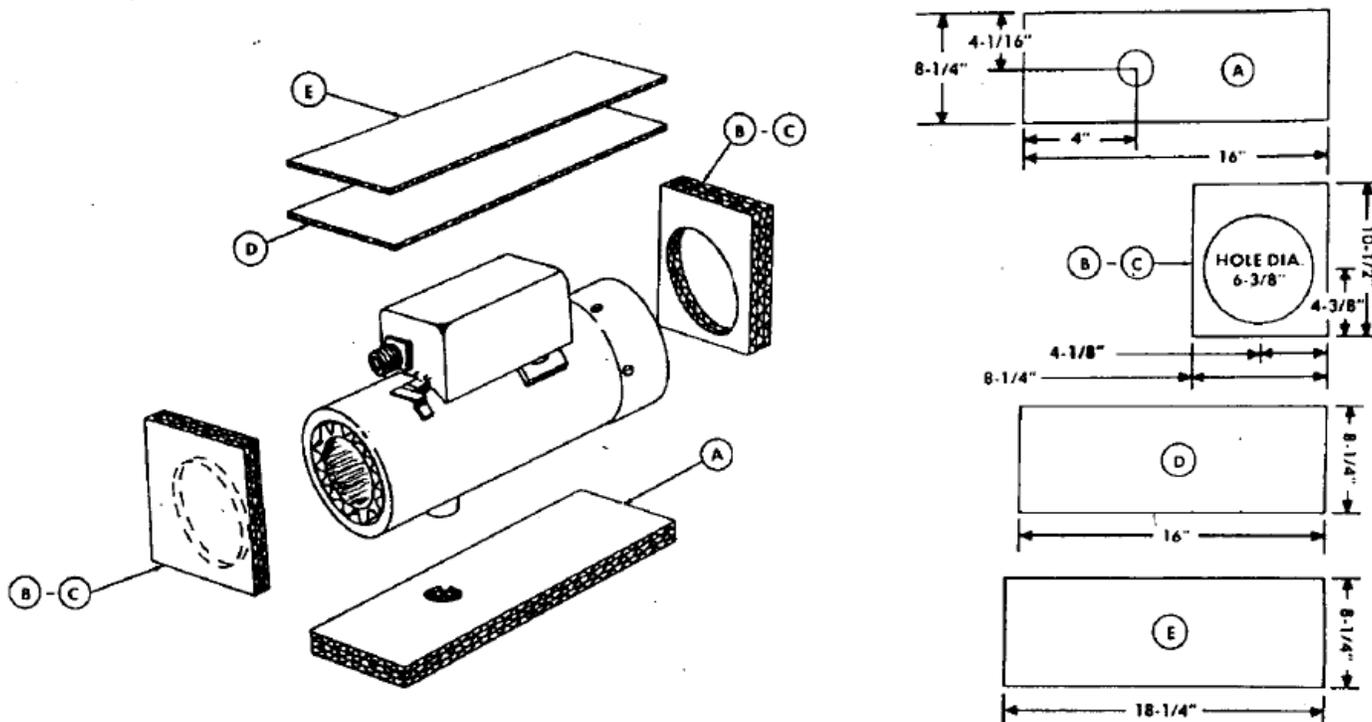

1. PADS "A" (2 PCS.) SHALL CONFORM TO ASTM-D4727, TYPE CF, CLASS D, VARIETY TW. HOLES ARE TO BE CUT IN BOTH PIECES. GLUE TOGETHER WITH SUITABLE WATERPROOF ADHESIVE IN ACCORDANCE WITH MIL-A-140A. PAD "A" IS TO BE PLACED UNDER HEATER ASSEMBLY AS SHOWN IN SKETCH.
2. PADS "B" AND "C" (2 PCS. EACH) SHALL CONFORM TO ASTM-D4727, TYPE CF, CLASS D, VARIETY TW. HOLES ARE TO BE CUT IN 1 PIECE OF PADS "B" AND "C". GLUE TOGETHER WITH SUITABLE WATER PROOF ADHESIVE IN ACCORDANCE WITH MIL-A-140A. PADS "B" AND "C" ARE TO BE PLACED ON EITHER END OF HEATER ASSEMBLY AS SHOWN IN SKETCH.
3. PADS "D" SHALL CONFORM TO ASTM-D4727, TYPE CF, GRADE 275, CLASS D, VARIETY SW. PAD "D" SHALL BE PLACED ON TOP OF HEATER ASSEMBLY AS SHOWN IN SKETCH.
4. PAD "E" SHALL CONFORM TO ASTM-D4727, TYPE CF, CLASS D, VARIETY DW. PAD "E" SHALL BE PLACED ON TOP OF PAD "D" AS SHOWN IN SKETCH.
5. CONTAINERS AND BAG WERE LEFT OFF SKETCH FOR CLARITY.